

THE ART OF QUIET SPACES FOR WORK AND SCHOOL

SERENITY ACOUSTIC PANELS COLOUR RANGE



Serenity

GREAT IDEAS FOR QUIET SPACES START HERE

Serenity Acoustic Wall Panels can
be cut to the designs you want




BLUEBERRY




TROJAN



FOUNDRY

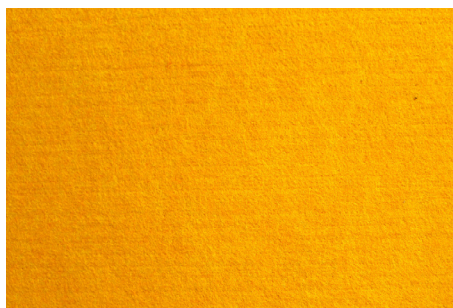


OCHRE

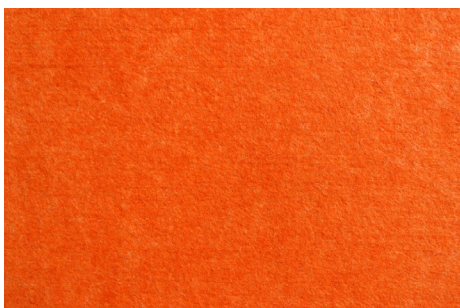


BLAZE




ALABASTER

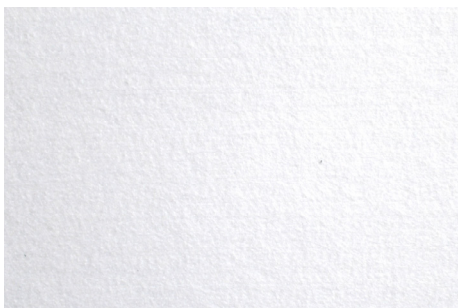


ICE WHITE

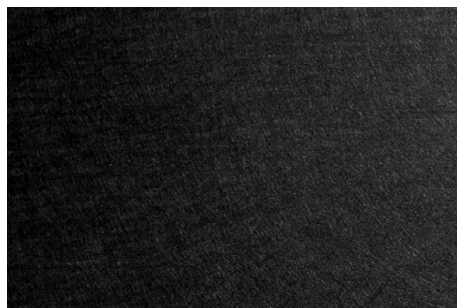


BLACKOUT

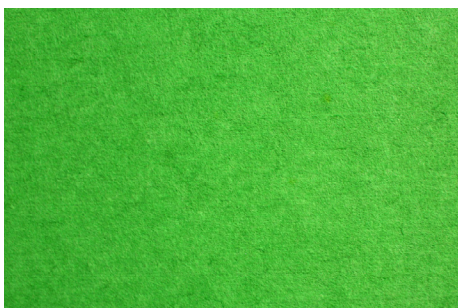

MANTIS GREEN

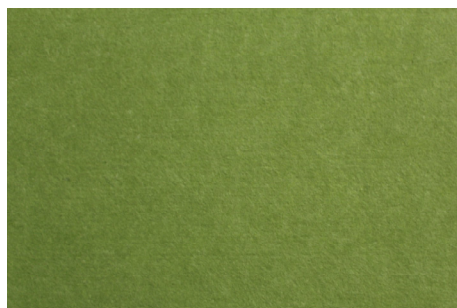

PISTACHIO

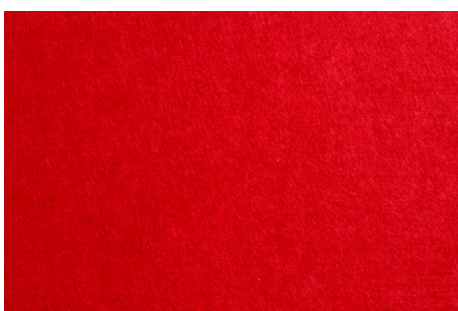

BULLSEYE



DESERT



CORK



PEARL

SERENITY SPECIFICATIONS

FIRE RATINGS

Extensive fire testing has been performed. This includes Retardant Standard, both the **US ASTM084 A level** and the **EN 3501-1** testing requirements, and with **ISO 5660** pending.

FABRIC CARE

If spills occur on fabric, ensure they are wiped away as soon as possible to prevent stains. Refrain from using large amounts of water and from rubbing vigorously if possible, as this could affect the overall finish of the surface.

ENVIRONMENTAL CERTIFICATIONS

ClassWall are committed to keeping the environment healthy and sustainable This is proven through the certificates gained as follows:

- **ISO 14001;**
- **Oeko–Tex Standard 100.**

ClassWall Serenity also complies with the quality process and best practice certificate.

- **ISO 9001**

ClassWall Serenity is made of **65% recycled material** and can be reprocessed again after use.

THERMAL CONDUCTIVITY

ClassWall Serenity has an SGS Thermal Conductivity rating **[W/(m.K)] is 0.039.**

ACOUSTIC ABSORPTION

ClassWall Serenity has attained a Noise Reduction Coefficient **(NRC) of 0.8** which can reduce reverberation by approximately 80%.

SPECIFICATIONS

Size: H 2400mm[+40mm]
 W 1800mm[+20mm]
 D 12mm panel size

Weight: 2400gsm

Density: 200kg/m³

Frequency/Hz	2000	2500	3150	4000
No cavity	0.69	0.78	0.82	0.89
Cavity 50mm	0.98	0.89	0.82	0.92
Cavity 100mm	0.78	0.93	0.87	0.92
Cavity 150mm	0.9	0.88	0.87	0.91

Contact us regarding custom shapes, printed designs, and ceiling baffles and tiles